



# Upgraded humidification, soft breath

G2S A20 is an auto-adjusting pressure device with integrated humidifier and wireless connectivity.

family cares




**Auto CPAP System**  
G2S A20






## Ultra modern design with a user friendly interface

- The water chamber with drawer structure and opening cover, is more convenient to fill water and clean.
- Auto on/off feature.

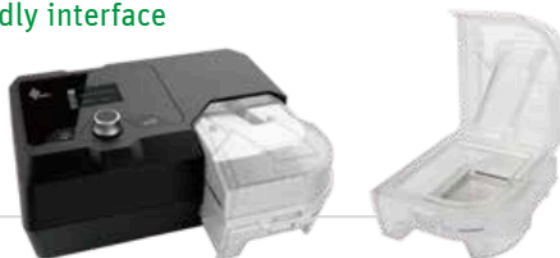


## Intelligent comfort features

- Newly designed integrated humidifier has large heating plate ( $> 50 \text{ cm}^2$ ), which ensures excellent humidifying capacity and improves comfort.
- Reslex exhalation pressure release feature let you fall asleep at a lower pressure easily.

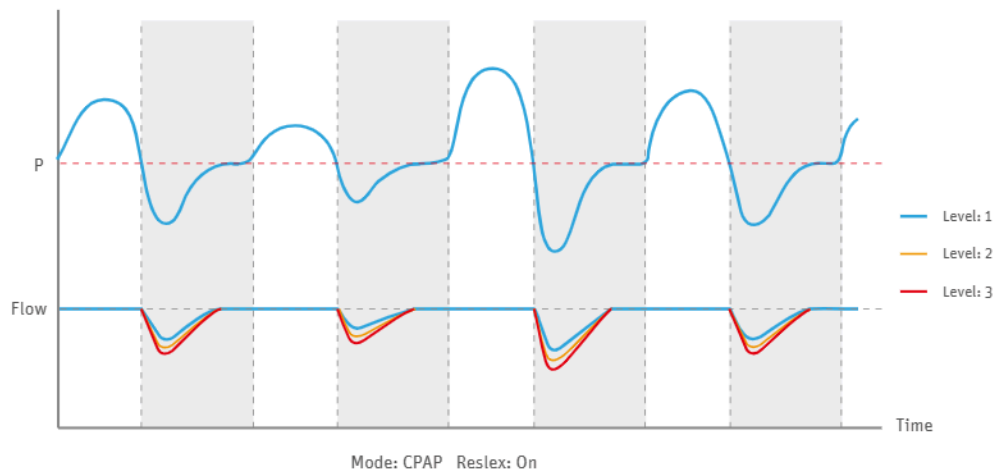

## Efficiencies in Therapy

- Auto CPAP pressure automatically to improve patient comfort based on monitoring of apnea and snoring events.

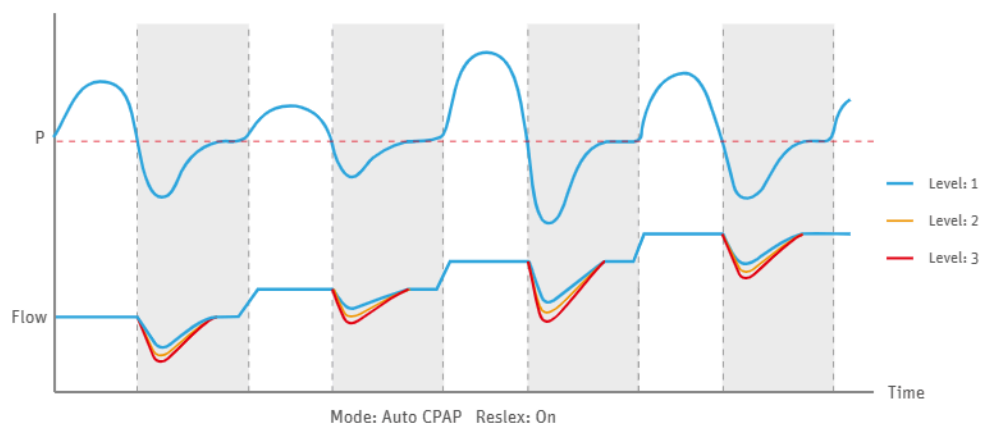

- Automatic leakage compensation ensure the therapy accuracy anywhere.

## Powerful data transfer/retrieval solution



SD Card



Cellular



iCode / iCode QR /  
iCode QR+

### Various way of therapy report review

Quick Report through Device Screen

BMCares App

BMCares Cloud Platform

iCode web version ([www.bmc-icode.com](http://www.bmc-icode.com))

BMC nPAP Data Analysis Software (PC software)

BMC Software web version ([www.icodeconnect.com/quick/info](http://www.icodeconnect.com/quick/info))

## Complete optional accessories

G2S adopts a series of complete accessories to meet different usage scenarios and needs:



Cellular Module



Power Adapter



Power Bank (D1402)



Heated Tubing



## Specifications

### Device Size

Dimensions: 274 mm × 184 mm × 115 mm

Weight: 1.9 kg

Water capacity: To maximum fill line 360 mL

### Heated Humidifier

Humidifier Settings: Off, 1 to 5 (95°F to 154.4°F / 35°C to 68°C)

Humidifier Output: No less than 10 mg H<sub>2</sub>O/L

### Work Mode

Auto CPAP, CPAP

### SD Card

The SD card can record patient data and fault information

### AC Power Consumption

100 - 240 V AC, 50/60 Hz, 2.0 A

### Sound Pressure Level

< 28 dB, when the device is working at the pressure of 10 hPa

### Maximum Flow

Test Pressures (hPa)	4	10	15	20
Measured Pressure at the Patient Connection Port (hPa)	3	9	14	19
Average Flow at the Patient Connection Port (L/min)	85	135	140	140

### Automatic leak compensation

Maximum Delivered Gas Temperature:  $\leq 3^{\circ}\text{C}$

### Static Pressure Stability:

$\pm 0.5$  hPa

### Pressure

4 to 20 hPa

## BMC Medical Co., Ltd.

Room 110, Tower A Fengyu Building, No.115 Fucheng Road, Haidian,  
100036 Beijing, PEOPLE'S REPUBLIC OF CHINA

Tel: +86-10-5166 3880 / Fax: +86-10-5166 3880 ext. 810

[en.bmc-medical.com](http://en.bmc-medical.com)